


## RV 3222-08 A

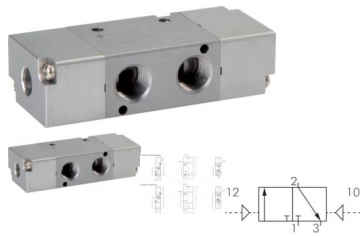

3/2-vägs pneumatisk ventil, G 1/4" (Pilot G 1/8"), impuls

Betyg: Inte betygsatt ännu

### Pris

Pris 734,14 kr

Pris utan moms 587,31 kr

Rabatt

Momsbelopp 146,83 kr

[Ställ en fråga om denna produkt](#)

## Beskrivning

### Technical data

function pulse valve

Thread G 1/4" (Pilot G 1/8")

flow [l/min] 800

A [mm] 84

B [mm] 35

C [mm] 22

D [mm] 8.2

E [mm] 29.5

F [mm] 25

G1 G 1/4"

H1 [mm] 4.2

H2 [mm] 3.3

J [mm] 17

K [mm] 27

# 3/2-vägs ventiler G 1/4, serie RV20: RV 3222-08 A

---

L [mm] 30

M [mm] 30,8

N [mm] 22,5

O [mm] 43

P [mm] 1,5

W [mm] 0

## Further information on RV3222-08A

Weight 155 g / Pcs

GTIN 4050571714932

Customs duty number 84812090

RoHS compliant Yes

Manufacturer EMC

Description - 3/2-way pneumatic valve, G 1/4" (Pilot G 1/8"), pulse valve

## Materials:

Body and slider: aluminium, seals: NBR, pilot: polyamide

## Temperature range:

-5°C to +60°C

## Operating pressure:

1,5 - 8 bar

## Media:

oiled and unoiled filtered compressed air

## Service life:

approx. 12 million switching cycles

All data are to be understood as non-binding reference values! We do not assume liability for any data selection not confirmed in writing. Unless otherwise specified, pressure values refer to liquids from Group II at +20°C.